


## Product datasheet

---

### 64225 10 W 6 V

Halogen (< 75 V) Single End

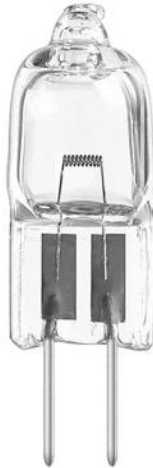

---

#### Areas of application

- Microscopy
- Laboratory & Analysis
- UV Curing
- Fiber Illumination
- Surgical & Dental Overhead

---

#### Product features and benefits

- Precise filament alignment with patented quartz pinch technology
- HLX lamps provide 10% higher luminous flux with same power consumption over standard halogen
- Instant on and nearly constant luminous flux over the life of the lamp
- Dimmable



Technical data

General Product Information

|                           |                                       |
|---------------------------|---------------------------------------|
| Product number (Americas) | 54260                                 |
| Product name (Americas)   | 64225 M/29 ESA/FHD 10W 6V 40/CS 1/SKU |
| ANSI code                 | ESA/FHS                               |
| LIF code                  | M/29                                  |
| Global order reference    | 64225                                 |


Electrical Data

|                 |      |
|-----------------|------|
| Nominal wattage | 10 W |
| Nominal voltage | 6 V  |
| Type of current | AC   |

Photometric Data

|                                  |                          |
|----------------------------------|--------------------------|
| Nominal luminous flux            | 200 lm                   |
| Illuminated field                | 1.7*0.65 mm <sup>2</sup> |
| Color temperature                | 3200 K                   |
| Color rendering index Ra         | 100                      |
| Light center length (LCL)        | 19.5 mm                  |
| Light center length (LCL) - (in) | 0.761 in                 |

Physical Attributes & Dimensions



|                |          |
|----------------|----------|
| Lamp base      | G4       |
| Diameter (in)  | 0.354 in |
| Diameter       | 9.5 mm   |
| Length         | 31.0 mm  |
| Product weight | 1.20 g   |

Product datasheet

Operating Conditions

|                  |     |
|------------------|-----|
| Burning position | s90 |
|------------------|-----|

Lifetime Data

|                  |        |
|------------------|--------|
| Nominal lifetime | 100 hr |
|------------------|--------|

Environmental & Regulatory Information

|                                                                       |                                    |
|-----------------------------------------------------------------------|------------------------------------|
| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |                                    |
| Primary article identifier                                            | 4050300006758                      |
| Declaration no. in SCIP database                                      | No declarable substances contained |
| Candidate list substance 1                                            | No declarable substances contained |

Country specific information

| Product code  | METEL code | SEG-No. | STK-Number | UK Org |
|---------------|------------|---------|------------|--------|
| 4050300006758 | OSRH64225  | -       | -          | -      |
| 4050300006758 | OSRH64225  | -       | -          | -      |

# Product datasheet

## Safety advice

To prevent personal injury or damage to property, halogen lamps may only be operated in suitable luminaires designed with suitable mechanisms (protective shields, grids, etc.) to ensure that in the event of a lamp bursting no parts/shards can escape and that during operation no ultraviolet radiation can escape. There must also be a warning sign to indicate that the lamps give off high levels of heat. Detailed information is available on request.

## Logistical Data

| Product code  | Product description | Packaging unit<br>(Pieces/Unit) | Dimensions (length<br>x width x height) | Volume               | Gross weight |
|---------------|---------------------|---------------------------------|-----------------------------------------|----------------------|--------------|
| 4050300006758 | 64225 10 W 6 V      | Folding carton box<br>1         | 25 mm x 23 mm x<br>70 mm                | 0.04 dm <sup>3</sup> | 7.00 g       |
| 4050300890951 | 64225 10 W 6 V      | Shipping carton box<br>40       | 144 mm x 107 mm x<br>121 mm             | 1.86 dm <sup>3</sup> | 169.00 g     |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.